1. SYSTEM MANIFOLD CONNECTIONS ARE GROOVED. (CLASS 125/150

ANSI FLANGED OPTIONAL)

2. DATA IS BASED ON FXA-700 TANK. REFER TO TANK DRAWINGS FOR DIMENSIONS AND WEIGHTS OF OTHER MODELS.

3. MAXIMUM SYSTEM PRESSURE MUST NOT EXCEED 175 PSIG OR OPTIONAL ADJACENT TANK PRESSURE RATING.

4. RIGHT HAND SYSTEM IS SHOWN. SPECIFY LEFT HAND IF REQUIRED.


- 5. FOR DIMENSIONS AND DRY WEIGHT CHOOSE THE LARGEST HP PUMP USED IN THE SYSTEM.
- 6. CUSTOM DIMENSIONS ARE AVAILABLE, CONSULT FACTORY.


7. * VFD'S OVER 15 HP MAY REQUIRE 84"


SYSTEM SUCTION AND DISCHARGE CONNECTIONS:

☐ GROOVED END (SHOWN)

☐ CLASS 125/150 ANSI FLANGED (NOT SHOWN)

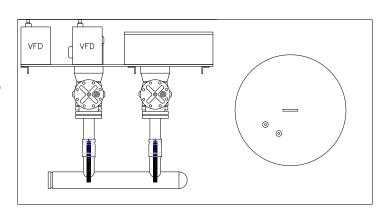

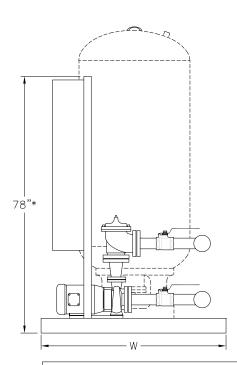

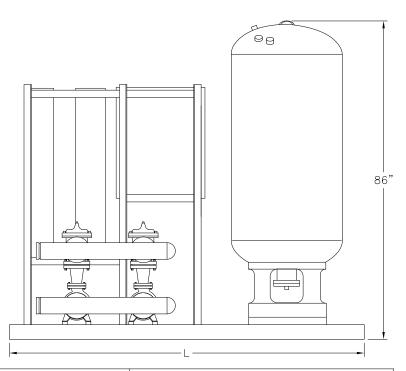

DIMENSIONS IN INCHES (APPROX.)			SYSTEM WEIGHT IN LBS.
HORSEPOWER PER PUMP	L	W	(APPROX.)
2-3 HORSEPOWER	88	44	1700
5-7.5 HORSEPOWER	96	50	1900
10-15 HORSEPOWER	104	58	2200
20-25 HORSEPOWER	110	64	2400

Not for	construction	purposes	unless	certified.
---------	--------------	----------	--------	------------

CERTIFIED BY: _____ DATE: _

VARIABLE SPEED DUPLEX END SUCTION WITH PRV'S	CANARIIS CORPORATION
AND SKID MOUNTED TANK	DATE: 01/05/09 SCALE: NTS www.canariis.com

Page 7.20.02 VS Rev. D